Landing D-line 90.0°

Complete sampled clearance profile
100.0% known ground across 77 samples. Source terrain is sampled at its native analysis resolution; accuracy is not independently surveyed.

Profile measurements

Horizontal span (m)	150.00
Start support elevation (m)	783.94
End support elevation (m)	764.83
End minus start elevation (m)	-19.11
Straight support chord (m)	151.21
Assumed maximum sag below chord (m)	4.50
Sampled geometric cable length (m)	151.56
Minimum sampled clearance (m)	6.63

Ground and assumed cable

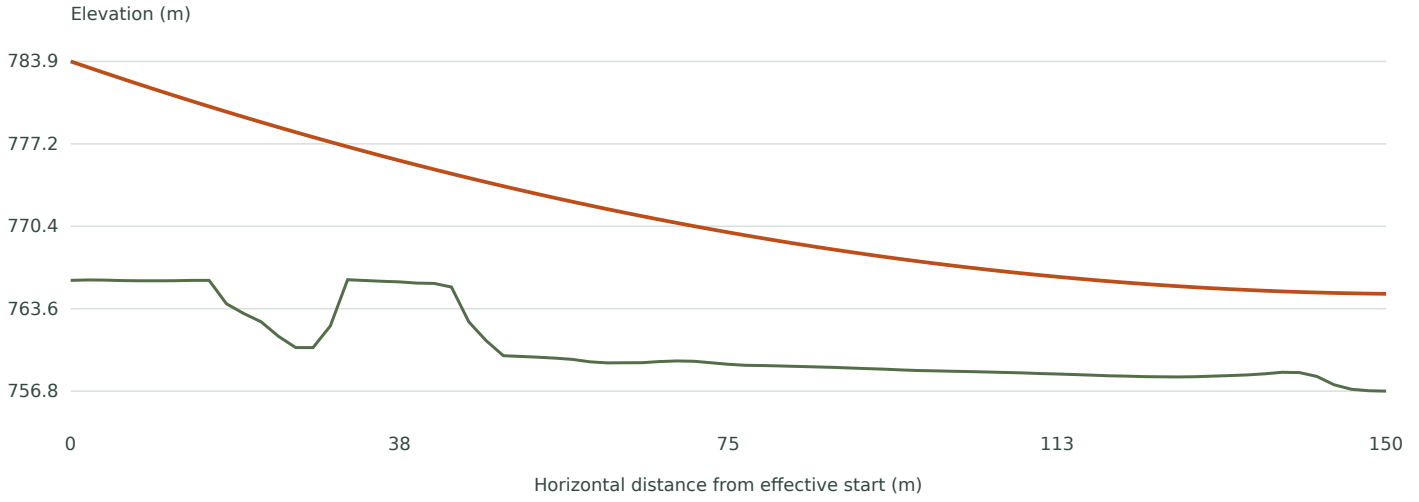

Green: source ground. Orange: assumed cable. Gaps remain blank. Horizontal and vertical plot scales differ.

Support inputs and assumptions

Effective start (longitude, latitude)	-122.81414089, 53.89341163
Effective end (longitude, latitude)	-122.81185172, 53.89341161
Yarder position	start
Yarder / tailhold height above ground	18.00 / 8.00 m
Start / end endpoint offset	0.00 / 0.00 m; positive inward, negative outward
Assumed sag	3.00% of horizontal span

Geometry available	Yes

Geometric screening with an assumed parabolic sag below the straight support chord. Sag is the entered percentage of horizontal span. Sampled cable length sums straight segments in the profile plane; it is not a purchase length or a catenary, tension, load, anchor, equipment or operating-safety calculation. Interior terrain gaps leave clearance unknown even when the assumed cable geometry is calculable.

Distances are horizontal along the resolved physical start-to-end direction. The support elevation difference is signed end minus start. Negative clearance means the assumed cable passes below sampled ground. A complete geometric profile does not establish a safe cable operation.

Terrain provenance

Source	BC 093G086 · classified-ground LiDAR DTM · 1 m (July 2024)
Source kind	geotiff
Native terrain spacing	1.00 m; resolution is not vertical accuracy
Source horizontal CRS	EPSG:3157
Export coordinate CRS	WGS84 longitude / latitude
Vertical reference	CGVD2013 (CGG2013), EPSG:6647; metres
Source URL	https://pgmaps.ahmadjalil.com/data/lidar-analysis/bc-093g086/dtm-1m.tif
SHA-256	b1259f310ceed97a11f25883d7df609390b977a293b622f9e4946a7853ad00e2

Sample schedule

Unknown values are not zero. Cable geometry can remain known over an interior terrain gap while clearance remains unknown.

Distance (m)	Ground (m)	Assumed cable (m)	Clearance (m)
0.00	765.94	783.94	18.00
1.97	765.97	783.45	17.48
3.95	765.96	782.97	17.01
5.92	765.92	782.50	16.58
7.89	765.90	782.03	16.13
9.87	765.90	781.57	15.67
11.84	765.91	781.12	15.21
13.82	765.93	780.67	14.74
15.79	765.93	780.23	14.30
17.76	764.01	779.79	15.78
19.74	763.21	779.37	16.15
21.71	762.53	778.94	16.41
23.68	761.34	778.53	17.18
25.66	760.41	778.12	17.70
27.63	760.41	777.71	17.30

Distance (m)	Ground (m)	Assumed cable (m)	Clearance (m)
29.61	762.18	777.31	15.13
31.58	765.99	776.92	10.93
33.55	765.93	776.54	10.61
35.53	765.86	776.16	10.30
37.50	765.81	775.78	9.97
39.47	765.71	775.42	9.71
41.45	765.69	775.06	9.37
43.42	765.39	774.70	9.32
45.39	762.53	774.36	11.82
47.37	760.99	774.01	13.03
49.34	759.74	773.68	13.94
51.32	759.68	773.35	13.67
53.29	759.62	773.03	13.41
55.26	759.54	772.71	13.17
57.24	759.44	772.40	12.96
59.21	759.24	772.09	12.85
61.18	759.15	771.80	12.64
63.16	759.16	771.50	12.34
65.13	759.17	771.22	12.05
67.11	759.26	770.94	11.68
69.08	759.31	770.67	11.35
71.05	759.29	770.40	11.11
73.03	759.16	770.14	10.97
75.00	759.04	769.88	10.85
76.97	758.95	769.63	10.68
78.95	758.93	769.39	10.46
80.92	758.90	769.16	10.26
82.89	758.86	768.93	10.06
84.87	758.82	768.70	9.88
86.84	758.79	768.49	9.70
88.82	758.73	768.28	9.54
90.79	758.68	768.07	9.39
92.76	758.64	767.87	9.24
94.74	758.57	767.68	9.11
96.71	758.52	767.49	8.97

Distance (m)	Ground (m)	Assumed cable (m)	Clearance (m)
98.68	758.50	767.31	8.82
100.66	758.46	767.14	8.68
102.63	758.44	766.97	8.54
104.61	758.40	766.81	8.41
106.58	758.37	766.66	8.29
108.55	758.33	766.51	8.18
110.53	758.28	766.37	8.09
112.50	758.24	766.23	7.99
114.47	758.19	766.10	7.91
116.45	758.15	765.98	7.83
118.42	758.09	765.86	7.77
120.39	758.06	765.75	7.68
122.37	758.02	765.64	7.62
124.34	758.01	765.55	7.54
126.32	758.00	765.45	7.46
128.29	758.02	765.37	7.35
130.26	758.06	765.29	7.22
132.24	758.11	765.21	7.10
134.21	758.16	765.15	6.98
136.18	758.26	765.08	6.83
138.16	758.38	765.03	6.65
140.13	758.35	764.98	6.63
142.11	758.04	764.94	6.90
144.08	757.35	764.90	7.55
146.05	756.98	764.87	7.89
148.03	756.86	764.85	7.99
150.00	756.83	764.83	8.00